

LED Machine Work Light ONN-M9P

Introduction:

1. ONN-M9P is designed for harsh environment.
2. Using anodized aluminum lamp body and tempered glass.
3. IP67 rating, resistant to high pressure wash, coolants and detergents.
4. High brightness SMD2835 LED chip, 90lm/w.
5. Frosted cover available to decrease glare.
6. Easy to install by screws.
7. DC24V input.




Application:

CNC machine work: engraving machine, EDM machine etc.
 Assembly and repair work table.
 Laboratories.

Warranty: 2 years


Certification: CE, RoHS, FCC

Dimension(mm):

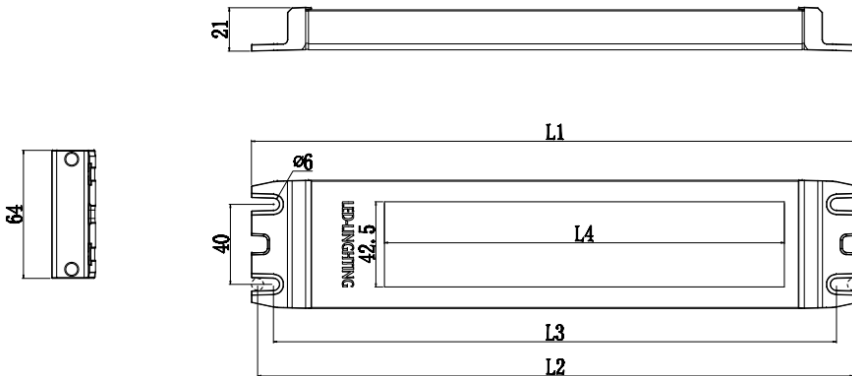

| | 300S | 400S | 600S |
|-------|---------|---------|---------|
| L1 | 304 | 404 | 604 |
| L2~L3 | 282~298 | 382~398 | 582~598 |
| L4 | 200 | 300 | 500 |



Ordering code:

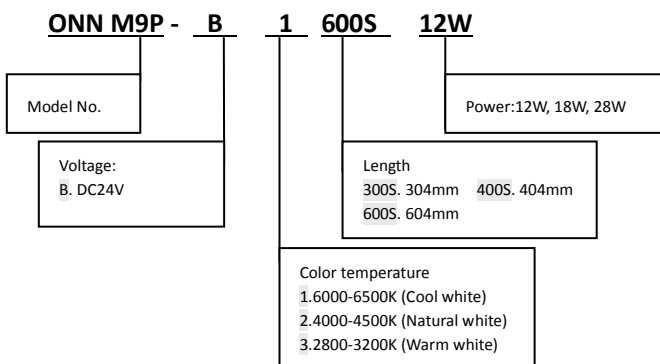

Parameter:

| | |
|-------------------------------|------------------------------------|
| Power(length) | 12W(304mm), 18W(404mm), 28W(604mm) |
| Input voltage(current) | DC24V |
| Lumen efficiency | 90lm/w |
| CRI | >80 |
| IP rating | IP67 |
| Beam angle | 120 degree |
| Color temperature | 2800-3200K, 4000-4500K, 6000-6500K |
| Material | Aluminum housing , Tempered glass |
| Lifetime | 50,000 hours |
| Working temperature/ humidity | -20~45°C / 10%-90% |
| Storage temperature/ humidity | -40~60°C / 10%-90% |
| Installation | Fixed by screws |
| Cable | 0.55m (2x0.3mm2) |


Light distribution data

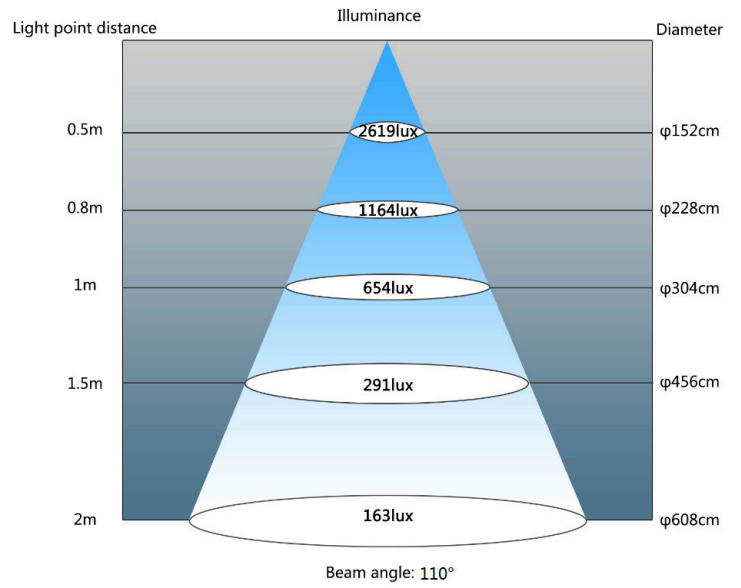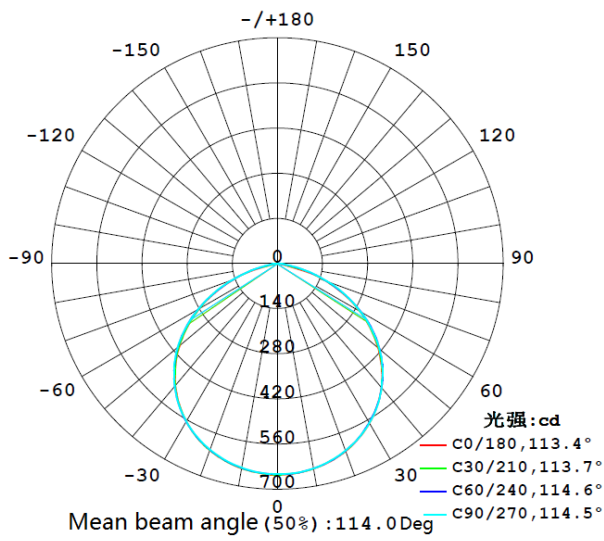

Wire connection:

DC24V input

Positive(+): Red



Negative(-): White

Package info

| | 300S | 400S | 600S |
|---------------|------------------|------------------|------------------|
| Net Weight/pc | 0.49KG | 0.64KG | 0.95KG |
| Qty/carton | 24pcs/carton | 28pcs/carton | 12pcs/carton |
| Carton Size | L380*W320*H290mm | L500*W350*H320mm | L680*W240*H200mm |
| Net Weight | 11.76kg | 18kg | 11.4kg |
| Gross Weight | 13.4kg | 20.2kg | 13.5kg |

